

LK-T21

Printer Innovation

LUKHAN



Innovation, High Quality Receipt Printer
The **LKT** Series



Thermal Printer

LK-T21

High quality thermal receipt printer

Ideal for POS system & Lottery system

Easy drop-in paper loading


Adjustable paper width (50mm ~ 82.5mm)

High speed performance (200mm per second)

Easy Load, Drop-In & Print



Interface

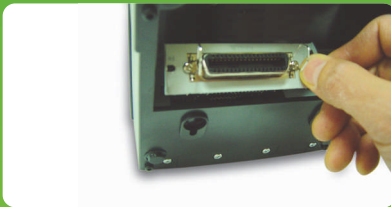

Wall mount available



LKT SERIES SPECIFICATION



MODEL		LK-T21
PRINT METHOD		Direct Thermal
PRINTING SPEED		200mm/sec
PRINTING DENSITY		180 DPI x 180 DPI
DOT PITCH		0.141mm x 0.141mm
EFFECTIVE PRINTING WIDTH		72mm, 512 Dots/Line
PRINTING DIRECTION		Unidirectional with friction feed
CHARACTER PER LINE		Font A(12 x 24) 42 columns / Font B(9 x 17) 56 columns
PAPER	TYPE	Thermal paper
	WIDTH	50mm ~ 82.5mm
	THICKNESS	0.06 ~ 0.09mm
	ROLL DIAMETER	Max. Ø83.0mm
	ROLL CORE INNER DIAMETER	12.5mm ± 0.5mm
RELIABILITY	TPH LIFE	100 km
	MCBF	60,000,000 Lines
CHARACTER SET	ALPHA NUMERIC CHARACTER	95
	EXTENDED GRAPHIC	128 x 18 page(1 space page)
	INTERNATIONAL CHARACTER	14
BARCODE		EAN-8, EAN-13, CODE39, ITF, UPC-A, CODABAR, CODE93, CODE128, PDF417(2D)
EMULATION		ESC/POS COMMAND COMPATIBLE
DRIVER		Windows Printer Driver(XP, 2000, 2003, WEPOS) OPOS, Linux
SENSOR		Paper end sensor, Cover open sensor Black mark sensor, Paper low sensor
CASH DRAWER DRIVER		2 circuits(24V, 1A max)
INTERFACE		Serial(RS-232C), Parallel(IEEE-1284), USB, Ethernet, WiFi, USB Combo
POWER	TYPE	External SMPS
	AC	100 ~ 240Vac 50/60 Hz
	DC	24Vdc / 2.5A
DIMENSION	Wmm x Dmm x Hmm	152 x 204 x 150
	W" x D" x H"	5.98 x 8.03 x 5.9
AUTO CUTTER	TYPE	Guillotine
	LIFE	1,000,000 cuts
	PAPER THICKNESS	0.06 ~ 0.09mm
	CUTTING METHOD	Full/Partial Cut
WEIGHT	INCLUDE AUTO CUTTER	1.7 kg
TEMPERATURE	OPERATING TEMPERATURE	5 ~ 40°C
	STORAGE TEMPERATURE	-20 ~ 60°C
HUMIDITY	OPERATING HUMIDITY	35 ~ 80%
	STORAGE HUMIDITY	10 ~ 90%

Specifications are subject to change without notice.

January 2007



SEWOO TECH Co., Ltd.

Doosung Bd, 689-20, Kumjung-dong,
Kunpo-si, Kyunggi-do, Korea